# Tumble dryer

T3VW.U

**3-series**
**Capacity: 19.8 lb**
**Vented**
**Number of program: 12**
**ADA Compliant: Yes, standing on the ASKO pedestal drawer**
**Installation: Freestanding**

**Construction and performance**
- Inner drum: Stainless Steel
- Motor: Long life and quiet brushless motor
- Heating system: Electric heater
- Drying types: Sensor or time controlled
- Drum volume: 4.2 Cubic ft
- Shortest program time: 30 min
- Easy to use lint filter: Yes

**Use and flexibility**
- Automatic programs: Yes
- Door opening diameter: 13 3/8 ''
- Door maximum opening angle: 180 °
- Sensors: Moisture sensor
- Auto condenser filter cleaning: No
- Load Light™ - Illumination of the drum: Yes

**Interaction and control**
- Remaining time indication: Yes
- Type of display: LCD
- Indication when program is ready: Yes
- Language settings: Chinese simpified, Chinese traditional, Swedish, Slovenian, Slovak, Russian, Polish, Norwegian, Dutch, Latvian, Lithuanian, Japanese, Italian, Croatian, French, Finnish, Estonian, Spanish, English, German, Danish, Czech

**Programs and options**
- Number of program: 12
- Drying programs: Wool, Bedding, Time program, Auto normal dry, Quick pro cotton, Down/bulky items, Mixed laundry, Synthetics, Delicate, Cotton iron, Cotton storage, AirRefresh
- Settings: Anti-crease function, Timed drying, Setting of dryness level, Low temperature option, Delayed start, Load level setting, Pause, Half load, Beep indicating that program is ended, Quick dry

**Design and integration**
- Door hinge placement: Right/Left
- Adjustable feet: 9/16 ''
- Easy mounting of ASKO dryer on top of the washers: Yes
- Loading type: Front load

**Safety and maintenance**
- Child lock on display: Yes
- Overheat protection: For motor and electronics

**Technical data**
- Heater power: 3000 W
- Noise level drying dB(A): 58
- Power consumption in standby mode: 0.39 W
- Consumption in off mode: 0.22 W
- Plug type: USA
- Connected load: 3400 W
- Voltage (V): 208-240 V

- Number of phases: 1
- Fuse: 30 A
- Frequency: 60 Hz
- Net weight: 89.7 lb
- ISO 14001 certified manufacturing: Yes

**Dimensions**
- Width: 23 7/16 ''
- Height: 33 7/16 ''
- Depth: 24 3/4 ''
- Depth with door open: 42 1/2 ''
- Length of electrical cord: 82 11/16 ''
- Venting position / diameter: Left/right/back-diameter 100
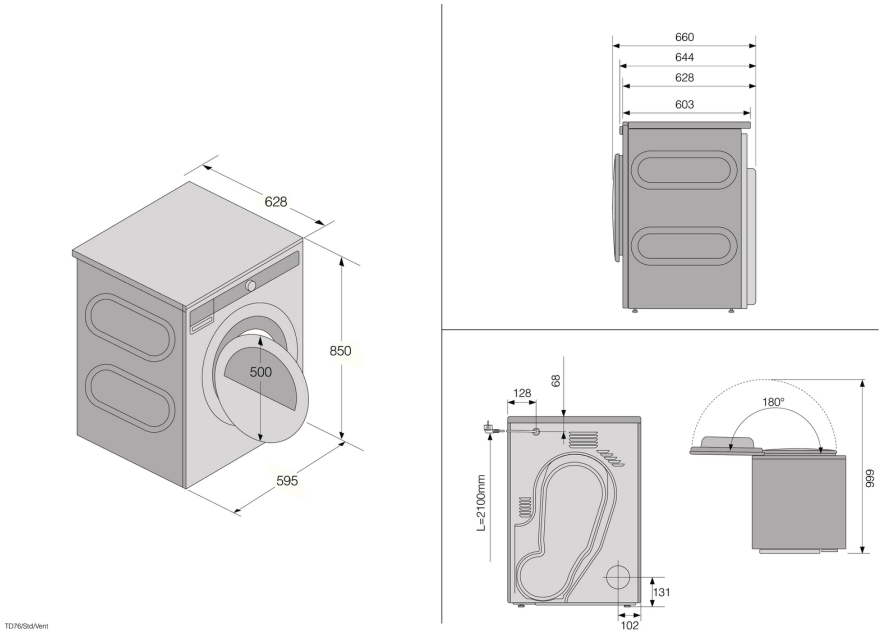
**Logistic information**
- Packaging width: 25 1/16 ''
- Packaging height: 36 1/4 ''
- Packaging depth: 29 1/4 ''
- Gross weight: 99.6 lb
- Product code: 746373
- EAN code: 3838783002488